

# Pilot Operated Directional Valves

## Catalog

ISO 4401 Size 07; ANSI/B93.7M-D07  
Remote Pilot Operated Directional Valve  
DG3V-7, 30 Design  
Solenoid Controlled Pilot Operated Directional Valve  
DG5V-7, 50 Design



*Powering Business Worldwide*




# EATON

Powering Business Worldwide

## The Power of One Eaton

Celebrating  
**100** YEARS  
Ideals that Endure

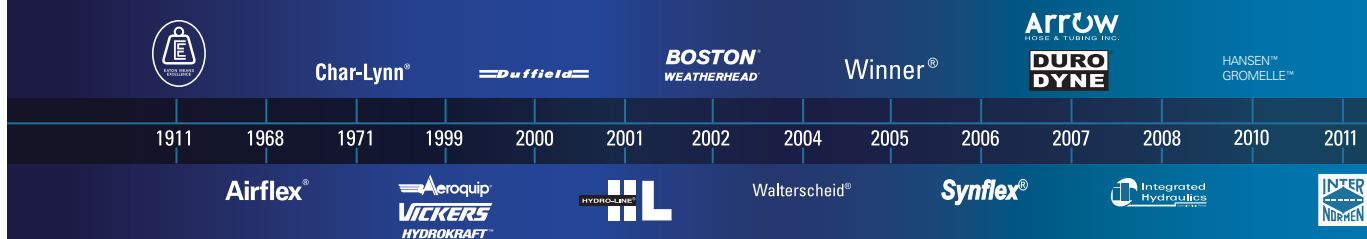

# EATON

Powering Business Worldwide

There's a certain energy at Eaton. It's the power of integrating the competencies of some of the world's most respected names to build a brand you can trust to meet every power management need. The energy created supports our commitment to powering business worldwide.

As the world's demand for high-efficiency hydraulic systems for mobile and stationary applications increase, Eaton is helping to solve these challenges more reliably, efficiently, and sustainably. Our goal is simple; to provide unique solutions across a wide range of markets that keep businesses on the leading edge of change. Visit [Eaton.com/hydraulics/fusion](http://Eaton.com/hydraulics/fusion).

**That's the power of One Eaton.**

# Serving eight key segments - sharing one focus



## Alternative Energy

Making energy sources technically practical and economically sound requires the kind of control made possible by high-quality components. When Eaton is on the inside, you will experience the reliable, consistent performance to create and capture energy—making renewable energy an every-day energy.



## Discrete Manufacturing

Produce at peak efficiency with the superior precision and repeatability of Eaton products. Eaton hydraulic components provide the precise control and consistent operation required for virtually every step in your manufacturing operation. With Eaton, we'll help you redefine the meaning of raw productivity.



## Oil & Gas

As the oil & gas industry continues to face further globalization and consolidation, large-scale organizations that can meet your needs in every corner of the world are more difficult to find. At Eaton, our portfolio of products is only surpassed by our tremendous reach.



## Processing

Whatever your industry, no matter which processes you manage, Eaton parts and systems help keep you up and running. Our components make equipment more efficient and easier to use, so you get optimal machine performance and maximum productivity.



## Agriculture & Forestry

There's a reason farming and forestry are called "working the land." These segments involve some of the hardest work and longest hours of any sector in the economy. Your productivity and profitability depend on the way you manage time and tasks.



## Commercial Vehicles

Eaton technologies can make your driving operation more successful. Greater comfort and productivity help increase driver retention, while reduced emissions, leaks, and noise improve environmental performance. Increased efficiencies overall mean lower costs and higher net revenue.



## Material Handling

Eaton hydraulic systems provide the precise control and consistent operation required for material handling and utility work. With a broad selection of products and solutions built in, Eaton helps make you a master of your domain.



## Construction & Mining

When you work on a large scale, even the details are big. You need to trust every part of the equipment that lets you handle construction and mining jobs. For reliable components that deliver consistent performance in extreme conditions, turn to Eaton.

## Eaton is a leading diversified power management company

Eaton provides reliable, efficient and safe power management for a growing number of industries.

### Understanding and helping our customers succeed

- Listening and understanding to requirements and business drivers
- Delivering solutions with value propositions to solve the critical business needs

### Knowing what's important to our customers and integrating that knowledge into the fabric of our business

- ...to deliver innovative, quality products
- ...to respond fast
- ...to provide dedicated customer service and support around the globe


### Our strength is global reach with local responsiveness and support

- Customers served in more than 150 countries
- Diverse channels ensure reliable availability and support
- Design and engineering teams provide support for standard products and custom solutions
- Eaton experts offer efficient product and application training

# Table of Contents

DG5V-7 50 Design, Solenoid Controlled Pilot Operated Directional Valve  
DG3V-7 30 Design, Remote Pilot Operated Directional Valve

Introduction .....	5
Functional Symbols .....	6
DG3V-7 Remote Pilot Operated Models.....	6
DG5V-7 Solenoid Controlled, Pilot Operated Models .....	7
Spool Types.....	8
Model Code .....	9
Application Notes .....	10
Operating Data.....	11
Performance Characteristics .....	13
Installation Dimensions .....	15
Optional Features .....	16
Electrical Information .....	17
Valve with spool position monitor (35A Spool) .....	17

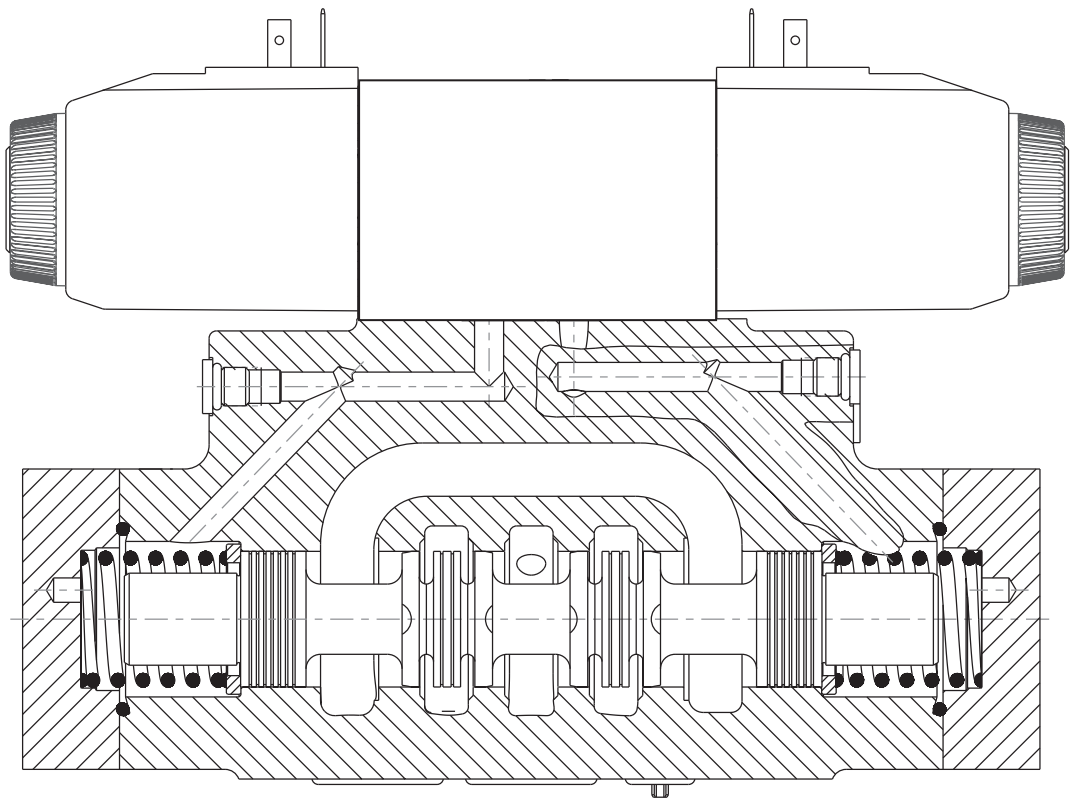



# Introduction

## General Description

DG\*V-7 valves are used primarily for controlling the starting, stopping and direction of fluid flow.

Two series of valves, DG5V solenoid controlled, pilot operated and DG3V pilot operated models are available with a wide selection of spools. These include meter-in and meter-out spools and a regeneration type that can obviate extra valves essential in traditional circuit arrangements.

All spools have been designed to provide low shock, fast response characteristics which can be enhanced by optional stroke and/or pilot choke adjustments.

Models include spring offset, spring centered and detented versions.

DG5V valves can be arranged for Internal or External pilot pressure and /or drain connections

## Highlights/Benefits


- 50 design will only have high performance pilot valves.
- High pressure and flow capability for maximum cost-effectiveness.
- Performance upgrade for rated pressure of 350 bar & flow up to 300 lpm.
- Low pressure drop in P-A, P-B, B-T, A-T to minimize power wastage
- Low shock characteristics to maximize machine life.
- Facility to change solenoid coil without disturbing the hydraulics envelop.
- A lower pressure drop reduces the amount of energy required from the pump to meet the desired pressure and flows needed to move cylinders/ equipment. This in turn can save the customer money by reducing the amount of electricity drawn from their machine.
- Tank port pressure up to 250 bar.
- External / Internal, Pilot pressure & Drain Plug accessible from the top face & without removing the end cover
- The many optional features, particularly for DG5V valves, permit matching to virtually every application within the valve's power capacity.
- Optional mainstage spool position monitoring switch (CE marked) for Spool 35A-EN600

# Functional Symbols


## DG3V-7, Remote Pilot operated Models

Comprehensive and simplified symbols.


### Spring Offset, End-to-End, DG3V-7-\*A



### Spring Offset, End-to-End, Opposite Hand, DG3V-7-\*AL



### Spring Centered, DG3V-7-\*C




## DG3V-7 Options

The following are shown in a DG3V-7-\*C example:

1. Pilot choke module
2. Stroke adjusters at either or at both ends (shown at both ends in example)

One or more options can be built into any DG3V-7 series valve.

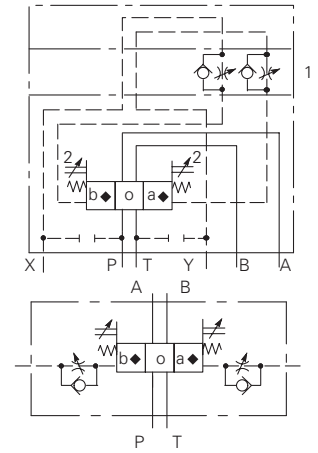

Spool types : All ▲

◆ "a" and "b" interchanged for spool type 8.


▲ X' and Y' spools require a stroke adjuster at one or both ends, dependent on the application, to limit stroke towards positions "a" and/or "b".

# Functional Symbols


## DG5V-7, Solenoid Controlled, Pilot Operated Models

Comprehensive and simplified symbols shown configured for external pilot supply and internal drain


**Spring Offset, End-to-End,  
DG5V-7-\*A**




**Spring Offset, End-to-End,  
Opposite Hand, DG5V-7-\*AL**




**Spring Centered, DG5V-7-\*C**




**Spring Offset, End-to-Center  
DG5V-7-\*B**



**Spring Offset, End-to-Center,  
Opposite Hand  
DG5V-7-\*BL**



**Detented, DG5V-7-\*N**




## DG5V-7 Options

The following are shown in a DG5V-7-\*C example:

1. Pilot choke module
2. Stroke adjusters, at either or at both ends (shown at both ends in example)
3. External pilot connection
4. Internal drain

One or more options can be built into any DG5 series valve.

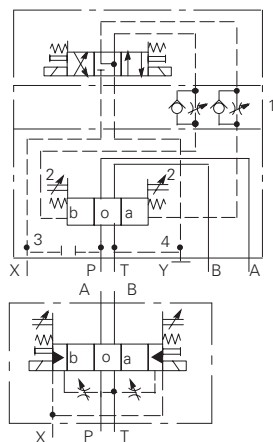

Spool types : All


◆ "a" and "b" interchanged for spool type 8.

▲ X' and Y' spools require a stroke adjuster at one or both ends, dependent on the application, to limit stroke towards positions "a" and/or "b".

# Functional Symbols

## Spool Types DG3V-7 and DG5V-7

Shown in 3-position form, plus 2 transients.

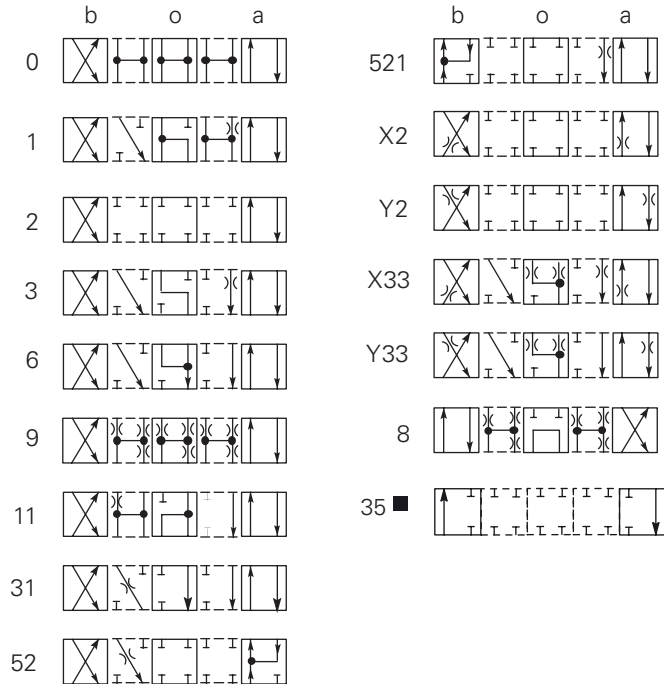

### Notes:

In certain 2-position valves, the "o" position becomes an additional transient, i.e. in DG5V-7-\*A(L) and DG5V-7-\*N valves.

■ Only 35A available




# Model Codes

DG3V-7 30 Series, Remote Pilot Operated Directional Valve


DG5V-7 50 Design, Solenoid Controlled Pilot Operated Directional Valve

**For Remote Pilot operated valves : ( F3 ) - DG3V-7- \* \*\* - ( \*\* ) -30**



**For solenoid controlled, pilot operated valves:**

**( F3 ) - DG5V-7- \* \*\* - ( \*\* ) - ( P \*\* ) - ( E ) - ( T ) - ( \* ) - ( V ) M - \*\*\*\*\* ( L ) - \* 7 - 50**



## 1 Fluid Compatibility

**Blank** = Standard BUNA-Nitrile Seals

**F3** = Viton Seals

*Note: For further information see "Hydraulic Fluids" section on page 13.*

## 2 Spool Type

See "Functional Symbols" section on pages 7

## 3 Spool Spring Arrangement

**A** = Spring offset, end-to-end (P to B when operated)

**AL** = As "A" but left-hand build (P to A when operated)

**B** = Spring offset, end-to-center (P to B when operated) ■

**BL** = As "B" but left-hand build (P to A when operated) ■

**C** = Spring centered

**N** = Two-position detented

■ *DG5V option. Same function from DG3V-7-\*C valves by alternating pilot supply to one port (X or Y) and permanently draining the other.*

## 4 Spool Control

**1** = Stroke adjustment at both ends ▲■

**2** = Pilot choke adjustment both ends

**3** = "1" and "2" combined ▲■

**7** = Stroke adjustment, port A end only ▼

**8** = Stroke adjustment, port B end only ▼

**27** = "2" and "7" combined ▼

**28** = "2" and "8" combined

Omit if not required

▲ *Not applicable to DG5V-7-\*B(L) models.*

▼ *Not applicable to models shown in the*

*"Spring offset, end-to-center, opposite hand" section on page 6*

■ *Not applicable for spool "8" models*

## 5 Main Stage Spool Monitoring Switch

Only with "35A" spool (Omit if not required.)

**PPA** - Offset sensing proximity switch "A" port end

*\* The spool position monitoring switch shown on this technical document is CE marked and certified and complies to European Standard EN 61000-6-4: 2001 (Emissions) for Class A and European Standard EN 61000-6-2: 2001 (Immunity).*

## 6 External Pilot Supply. DG5V Valve Option

Omit for internal pilot supply

## 7 Internal Pilot Drain, DG5V Valve Option

Omit for external drain, which is also mandatory for 1, 8 and 9 spool-type valves

## 8 Manual Override Option

**Blank** = Plain override in solenoid end(s) only ▲

**H** = Water-resistant manual override on solenoid end(s) ▲

**Z** = No override at either end

▲ *No override in non-solenoid end of single-solenoid valves.*

## 9 Solenoid Energization Identity

V = Solenoid "A" is at port A end of pilot valve and/or solenoid "B" at port B end independent of main-stage valve port locations or spool type; German practice.

Omit (except as noted below) for US ANSI B93.9 standard whereby solenoid "A" is that which, when

energized, connects P to A in main-stage valve, and/or solenoid "B" connects P to B.

*Note: Energization identities on valves with type 8 spools are identical under US and German practices. In such cases the "V" code is used.*

## 10 Solenoid Type/Connection(s)

**U** = ISO 4400 (DIN 43650) mounting

**U1** = ISO4400 fitted with PG11 plug

**U6** = ISO4400 with fitted DIN plug with lights

**KU** = Top exit flying lead (150mm)

**KUP4** = Junior timer (Amp) connector

**KUP5** = Integral Deutsch Connector

**FW** = Flying lead with 1/2" NPT thread wiring housing

**FTW** = Flying lead with 1/2" NPT thread junction box and terminal strip

■ *Some female plug connector options available separately from Eaton. Others available from electrical stockists.*

◆ *Female connector to be supplied by user.*

## 11 Indicator Lights, Option for Codes FTW, in item 10.

L = Lights fitted

Omit if lights not required

*For U-code solenoids use plug with integral light.*

## 12 Coil Rating

See "Operating Data" on page 11 for further information.

**B** = 110V AC 50 Hz/ ◆  
120V AC 60 Hz

**BL** = 110V AC 50 Hz/ ◆  
120V AC 60 Hz  
- Low Power

**D** = 220V AC 50 Hz/ ◆  
240V AC 60 Hz

**DS** = 28V DC 30 Watt

**ED** = 250V AC 50 Hz

**G** = 12V DC

**GL** = 12V DC 18 Watt

**H** = 24V DC

**HL** = 24V DC 18 Watt

◆ *For 60 Hz or dual frequency.*

## 14 Design Number

30 series for DG3V valves.  
50 series for DG5V valves.

*Subject to change.*

**For Mounting Subplate and Fastener Kit Options** See "Supporting products" on page 11

# Application Notes DG5V-7 50 Design

## Pilot Pressure

- a. Pilot pressure must always exceed tank line pressure by at least the requisite minimum pilot pressure. This also applies when combining open center spools (0, 1, 8, 9 and 11) with internal pilot pressure, but they should be used only with externally drained valves.
- b. Internally drained valves should be used only when surges in the tank line cannot possibly overcome the minimum pilot pressure differential referred to above. When the possibility of pressure surges in the tank line exist, externally drained valves are recommended.
- c. When DG5V-7-\*N valves are de-energized the pilot and main spools remain in the last selected position, provided that pilot pressure is maintained. If pilot pressure fails, or falls below the minimum, the main spool will spring center.

**Caution:** Because of this in-built feature the flow conditions of the center position must be selected with care, for the effect on both the direction of flow and the pilot pressure

## Stroke Adjustment Options

These control the maximum opening of the main spool/body passages by adjusting the limits of spool stroke. By this means, the response time and the pressure drop across the valve for any particular flow rate can be controlled. Stroke adjusters can be fitted at either or both ends of the main-stage valve for adjusting the stroke in one or both directions. One use of stroke adjusters is for controlling the metering characteristics of "X\*" or "Y\*" - type spools. (See model code #4.)

## Pilot Choke Adjustment Options

These provide a meter-out flow control system to the fluid in the pilot chambers of main-stage valves. It allows the velocity of the mainstage spool to be controlled, thereby reducing transient shock condition. For optimum results, a constant reduced pilot pressure is recommended.

## Control Data, General

- a. Dependent on the application and the system filtration, any sliding spool valve, if held shifted under pressure for long periods of time, may stick and not move readily due to fluid residue formation. It may therefore need to be cycled periodically to prevent this from happening.
- b. Surges of fluid in a common drain line serving two or more valves can be of sufficient magnitude to cause inadvertent shifting of the spools. It is recommended that circuit protection be used, such as separate drain lines.
- c. Control by stroke adjusters, pilot chokes and minimum-pilot-pressure generator options is described on this page.

# Operating Data

Performance data typical under standard test conditions  
which use antiwear hydraulic oil (Class L-HM) at 21 cSt (102 SUS) and 50°C (122°F).

## MAXIMUM PRESSURES:

### DG3V-7 valves; ports:

P, A, B	350 bar (5000 psi)
T	300 bar (4351 psi)
X and Y	250 bar (2636 psi)

### DG5V-7-\*\*(L)(-\*)(-E)(-\*) valves, (externally drained); ports:

P, A, B	350 bar (5000 psi)
T	300 bar (4351 psi)
Y	210 bar (3045 psi) *
X	250 bar (3626 psi) **

### DG5V-7-\*\*(L)(-\*)(-E)-T(-\*) valves, (internally drained); ports:

P, A, B	350 bar (5000 psi)
T and Y	210 bar (3045 psi) *
X	250 bar (3626 psi) **

\*Restricted by Pilot valve core tube rating

\*\*A pressure reducer valve must be used for higher pressures.

## MAXIMUM FLOW RATES, L/MIN (USGPM) AT THE MINIMUM PILOT PRESSURES, AND WITH SPOOL TYPE:

Operating Pressure in bar (psi)	50(725)	100(1450)	150(2175)	200(1900)	250(3625)	300(4351)	350(5076)
0*,2,3,6,8*,9**,31,33,52,521,X2,X33,Y2,Y33,35A	300(80)	300(80)	300(80)	300(80)	300(80)	300(80)	300(80)
1*,11*	300(80)	300(80)	300(80)	300(80)	175(47)	125(34)	70(20)

\*\* SUBJECT TO P-T PRESSURE SATURATION.

\* Open centred spools

### Pilot pressures

See "Pilot Pressures" on page 12

### Control (swept) volume(s), DG3V and main-stage of DG5V valves:

Center-to-end	4.9 cm <sup>3</sup> (0.29 in <sup>3</sup> )
End-to-end	9.8 cm <sup>3</sup> (0.60 in <sup>3</sup> )

## ELECTRICAL INFORMATION:

### Coil Voltage ratings, DG5V valves

See 12 in "Model Code" on page 8

### Coil Voltage limits, DG5V valves:

Maximum voltage	See "Temperature limits", on page 11
Minimum voltage	90% of rated voltage

### Power consumption, DG5V valves with AC solenoids:

	Initial VA rms	Holding VA rms
Single-frequency coils, 50 Hz types "A" and "C"	225	39
Dual-frequency coils at 50 Hz, types "B" and "D"	265	49
Dual-frequency coils at 60 Hz, types "B" and "D"	260	48

### Power consumption, DG5V valves with DC solenoids

30W at rated voltage and 20 C (68 F)

### Relative duty factor, DG5V valves

Continuous; ED = 100%

### Type of protection, DG5V valves:

ISO 4400 coils with plug fitted correctly	IEC 144 class IP65
Junction box	IEC 144 class IP65 (NEMA 4)
Coil winding	Class H
Lead wires (coil types "F****")	Class H
Coil encapsulation	Class F

# Operating Data

**Pressure drop characteristics** See page 12, 13

## Response times, DG5V valves:

Typical values for a DG5V-7-2C-E-50 based on a 100% rated voltage from energisation/ de-energisation of the coil to full displacement of mainstage spool. At 150 lt/min. and 175 bar.

Coil rating:	Pilot pressure, bar (psi):	Energizing	Time, ms ♦ De-energizing
110V50Hz AC	15 (218)	60	40*
	100 (1450)	25	40*
	250 (3600)	15	40*
24V DC	15 (218)	95	60*
	100 (1450)	60	60*
	250 (3600)	50	60*

♦ From applying a signal at the solenoid until the main-stage spool completes its travel.

\*Based on pure switched circuit condition, devoid of effects of any suppression diodes.

## TEMPERATURE LIMITS:

Fluid temperature limits -20°C (-4°F) to +70°C (158°F)

Ambient temperature limits: -20°C (-4°F) to +70°C (158°F)

## Maximum ambients, DG5V valves with coils listed in 12 in "Model Code" two pages back, and under conditions stated below:

Dual-frequency coils:

at 50 Hz and 107% of rated voltage	65°C (150°F)
at 50 Hz and 110% of rated voltage	65°C (150°F)
at 60 Hz and 107% of rated voltage	65°C (150°F)
at 60 Hz and 110% of rated voltage	65°C (150°F)
Single-frequency (50 Hz) coils at 50 Hz and 110% of rated voltage	65°C (150°F)
DC coils at 110% of rated voltage	70°C (158°F)

## INSTALLATION DIMENSIONS:

Valves	See page 14
Mounting Surface	See page 14
<b>Mass (weight), basic models:</b>	<b>kg (lb) approx.</b>
DG3V-7	7,3 (16.1) ♦
DG5V-7-*A/B (AC voltages)	8,4 (18.5) ♦
DG5V-7-*A/B (DC voltages)	8,5 (18.7) ♦
DG5V-7-*C/N (AC voltages)	8,7 (19.2) ♦
DG5V-7-*C/N (DC voltages)	9,1 (20.0) ♦

♦ Add 1,1 kg (2.4 lb) when pilot chock adjustment is fitted.

## Supporting products:

Subplate	See catalog 2425
Fastener kits	See catalog 2314 for available metric bolt kit options, i.e. BKDG7-858918 and BKDG7-858919.

## Installation and start-up (commissioning):

Mounting attitudes, DG3V series	Optional for models shown.
Mounting attitudes, DG5V series	Optional for DG5V-7-*B(L)/C/D models, but horizontal mounting is recommended for DG5V-7-*A(L)/N models

## After-sales service:

Spare-parts data for DG3 valves and main stages of DG5 valves, and pilot choke modules	Consult your local Eaton representative
Spare-parts data for DG4V-3S pilot stages of DG5 models	Ask for spares leaflet I-3886-S (minimal text, in English).

# Performance Characteristics

## Pilot Pressures

Maximum: 350 bar (5000 psi). Typical minimum differential pilot pressure characteristics, shown below, are based on looped flow through P to A to B to T under standard test conditions.

Spool Type	0	1	2	3	6	8	9	11	31	33	52	X*	Y*	35A
Minimum Differential Pilot Pressure (bar)	9	9	12	12	12	9	9	9	12	12	12	12	12	12

## Pressure Drop Characteristics

The following typical pressure drops ( $\Delta p$ ) at flow rates (Q) are based on standard test conditions, using oil of 0,865 specific gravity. Except where otherwise stated, for any other flow rate ( $Q_1$ ) the pressure drop ( $\Delta p_1$ ) will be approximately  $\Delta p_1 = \Delta p (Q_1/Q)^2$ .


SPOOL TYPE	SPOOL POSITION COVERED	P-A	B-T	P-B	A-T	P-T
0	All	1	5	1	4	5
1	Energised	1	4	1	4	
	De-energised	7♦♦			4♦	8♦♦
2	All	1	4	1	1	
3	Energised	1	4	1	4	
	De-energised				7	
6	Energised	1	5	1	4	
	De-energised		8		8	
8	All	3	3	3	7	9
9	Energised	2	5	3	3	
	De-energised	-	-	-	-	** • • •
11	Energised	1	5	1	1	
	De-energised		4♦	7♦♦		8♦
31	Energised	1	5	1	1	
	De-energised		8			
33	Energised	1	5	1	3	
	De-energised		-		-	
35A	Energised		8			
	De-energised	6				
52	Energised P-A	3♦		6♦♦		
52	Energised P-B			3	2	
X2	All	*	5	*	2	
X33	Energised	*	5	*	2	
	De-energised		-		-	
Y2	All	3	11	3	8	
Y33	Energised	2	10	2	8	
	De-energised		-		-	

\* 65 bar @300l/min.

\*\* 70 bar @150l/min.

- Port B blocked
- ♦♦ Port A blocked
- ♦ Port P blocked
- ♦♦ Port T blocked

# Performance Characteristics

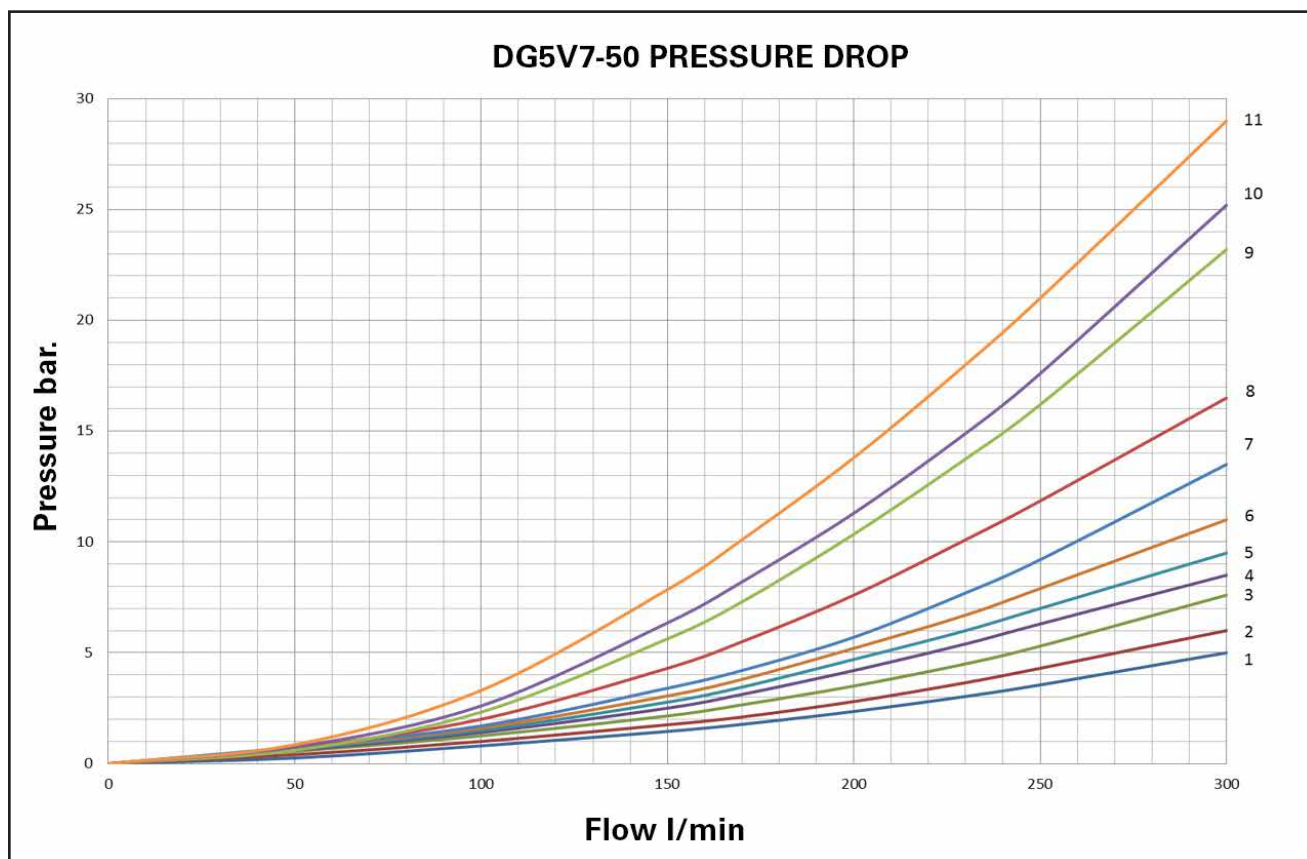

## Hydraulics Fluids Contamination Control Requirements

Recommendations on Hydraulic Fluids and contamination control methods and the selection of products to control fluid condition are included in Eaton Hydraulics Fluid Recommendation 03-401-2010 rev 1

## Fluid Temperatures

For petroleum oil:

Min. . . . . -20°C (-4°F)

Max.\* . . . . . +70°C (+158°F)

\*To obtain optimum service life from both fluid and hydraulic system, 65°C (150°F) normally is the maximum temperature.

For other fluids where limits are outside those of petroleum oil, consult fluid manufacturer or Eaton representative.

Whatever the actual temperature range, ensure that viscosities stay within those specified under "Hydraulic Fluids".



# Installation Dimensions


Millimeters (inches)

## Solenoid Controlled Models with ISO 4400 (DIN 43650)

### Electrical Connections and Pilot Choke

DG5V-7-\*\*-\*(L)(-2)(-E)(-T)(-\*)-(V)M-U example

For stroke adjusters see page 15

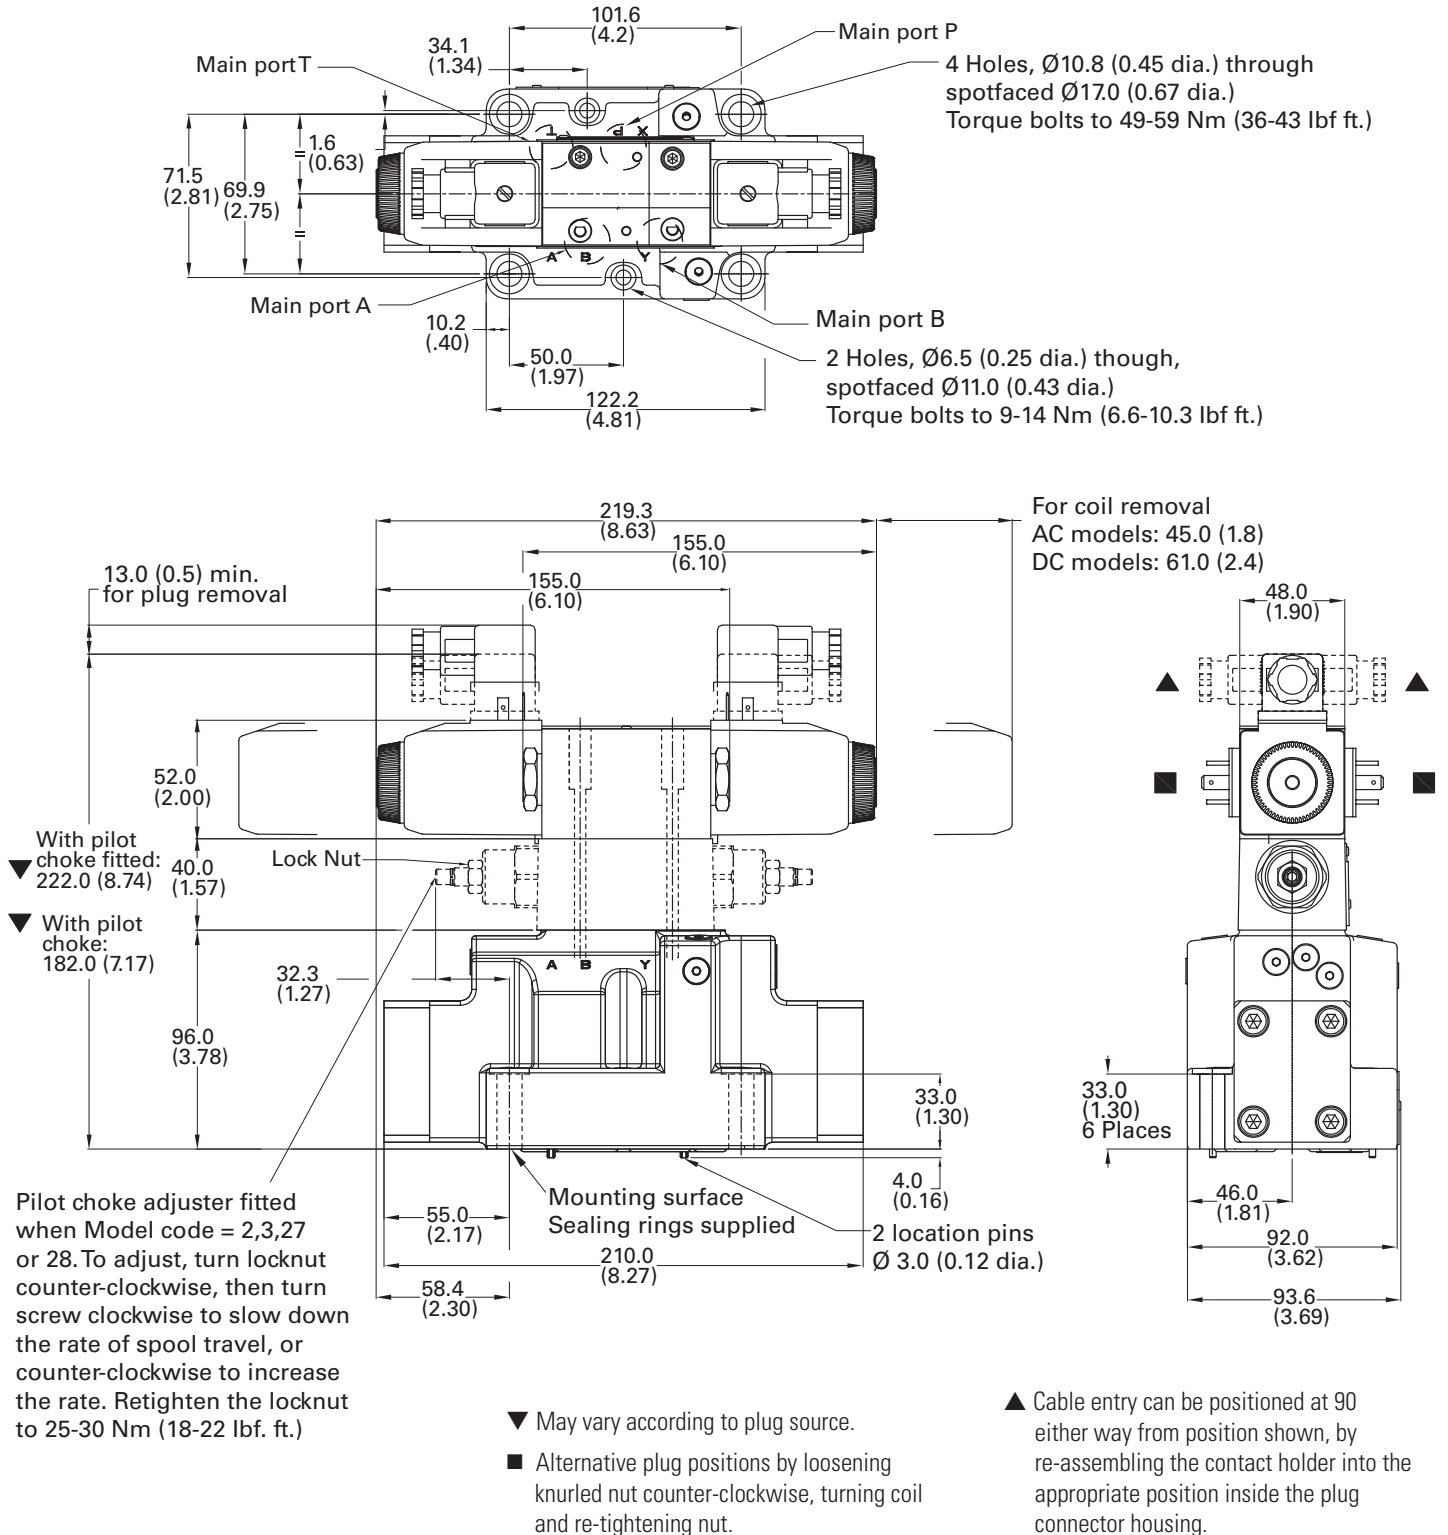


# Optional Features

## Solenoid Controlled Models with Stroke Adjusters

DG5V-7-\*\*\*(-2)(-E)(-T)(-\*)-(V)M-U example

Stroke adjuster fitted both end when Model Code 4 = 1 or 3

Stroke adjuster fitted this end when Model Code 4 = 7 or 27

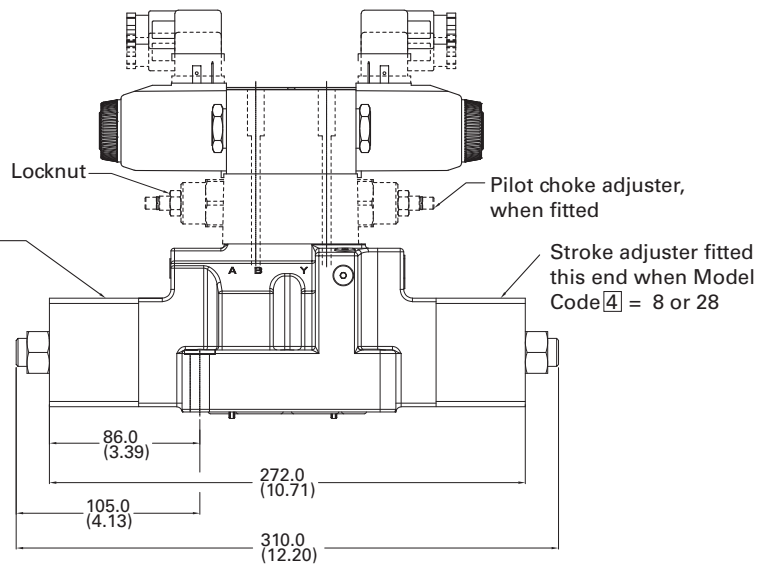

### To Adjust:

Turn locknut counter-clockwise, then turn screw clockwise to shorten stroke, or counter-clockwise to increase stroke. Re-tighten locknut.

## Solenoid Controlled Models with Junction Box having Optional Terminal Strip and Indicator Lights

DG5V-7-\*\*\*(-\*)(-E)(-T)(-\*)-(V)MF\*\*(-L) example.

Available also with other options shown above and on previous page.

1/2 NPT for F(T)W options, at both ends. Closure plug fitted at one end.


For other options see 9 & 10 in "Model Code"

■ Ref. "Model Code": 10

Codes "FW": 2 lead wires for each solenoid, approx. 150 (6.0) long.

M3 (#6) terminals provided for customer connection.

Codes "FTW": Valve supplied with lead wires connected into terminal strip suitable for M3 (#6) terminals provided for customer connection.

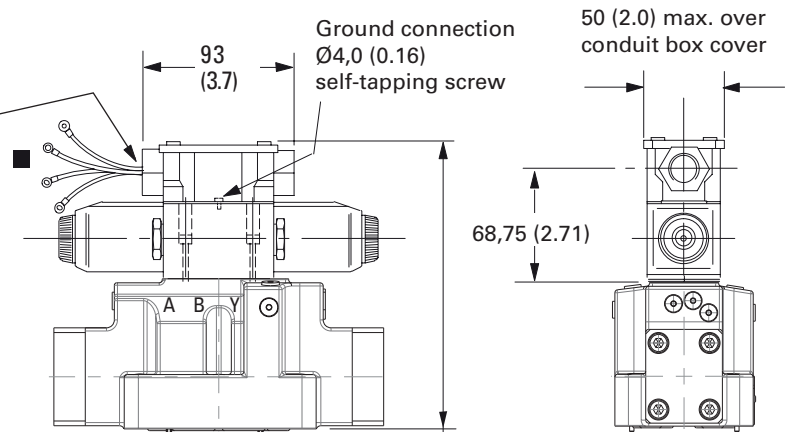


## Pilot Operated Models with Optional Pilot Choke and/or Stroke Adjusters

DG3V-7-\*\*-2)(-\*\*) examples

Stroke adjuster fitted both end when Model Code 4 = 1 or 3

Stroke adjuster fitted this end when Model Code 4 = 7 or 27

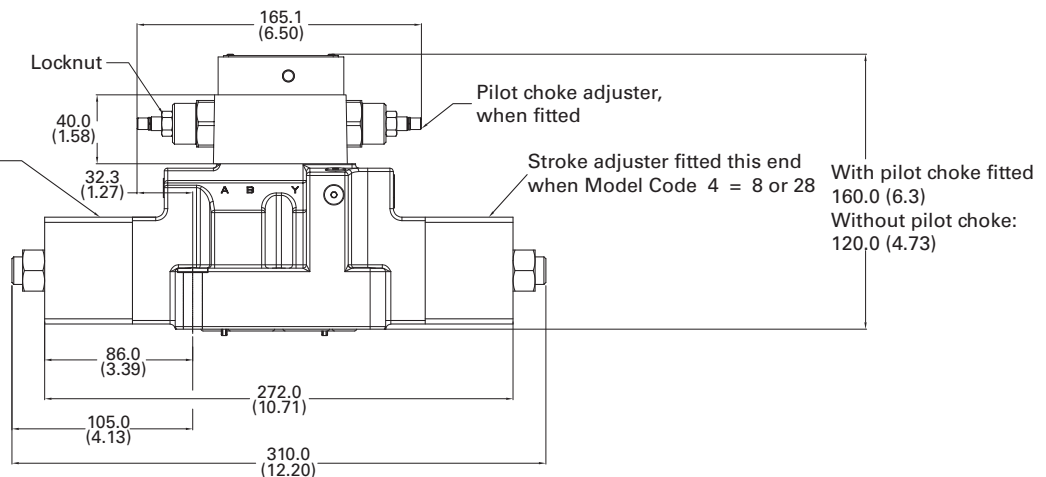


With pilot choke fitted: 227,0 (8.94)  
Without pilot choke: 187,0 (7.36)

With pilot choke fitted: 160,0 (6.3)  
Without pilot choke: 120,0 (4.73)

Electrical Information


DG5V-7-35A-PPA-(-E)(-T)-\*\*\*\*\*-50 Valve with Spool Position Monitor

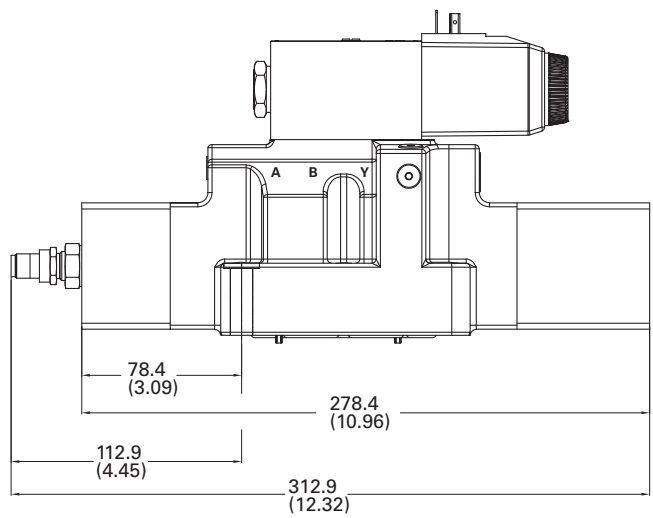

SPECIFICATIONS


Supply Voltage (Vs)	10 to 30 Vdc
Supply Current (Is)	8 mA at 24 Vdc (plus load current)
Supply Over-voltage Rating:	35 Vdc continuous
Supply Reverse Polarity Rating	-35 Vdc (with no shorts)
Short Circuit Tolerance:	Continuous short between any two pins
High Potential Test, Pin to Case:	300 Vdc
Electromagnetic Compatibility:	ISO 7637 Parts O and I worst case and Immunity to Radiated Electromagnetic Fields, 10 KHZ to 1 GHZ per SAE J1113/25 Sep 95
Pins to Case Resistance	50 Megohms
Load Dump Tolerance:	80 Vdc Peak, 400 ms Decay, with 1.5 Ohm Source Impedance
Switching Frequency:	0 to 3K Hz
Output:	Open collector PNP sourcing, normally open
Sensing Distance (offset position):	1.27 ± 0.25 mm (.050" ± .010")
Hysteresis:	0.25 mm (.010") Max.
Rise/Fall Time:	6.5/1.5 microsec R1=820 Ohm, C1=20 pF @ 8Vdc
Output Leakage Current	10µa Max.
Output Voltage High:	+Vs – 2.2 Vdc minimum
Output Load Current:	200 mA Max.
Operating Pressure:	350 bar (5000 psi)
Operating Temperature:	-40° to 110°C
Humidity:	0 to 100%

Electrical information shown in this window is for offset sensing, Proximity Switch "PPA" Model

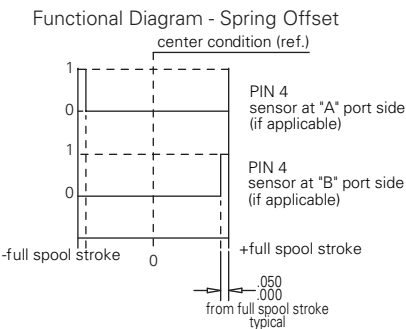


0=voltage at pin 4 0.5V min.  
1=voltage at pin 4 (Vs – 2.2V)min.

Output Circuit Wiring Instructions



Connector Detail



Eaton  
Hydraulics Group USA  
14615 Lone Oak Road  
Eden Prairie, MN 55344  
USA  
Tel: 952-937-9800  
Fax: 952-294-7722  
[www.eaton.com/hydraulics](http://www.eaton.com/hydraulics)

Eaton  
Hydraulics Group Europe  
Route de la Longeraie 7  
1110 Morges  
Switzerland  
Tel: +41 (0) 21 811 4600  
Fax: +41 (0) 21 811 4601

Eaton  
Hydraulics Group Asia Pacific  
Eaton Building  
4th Floor, No. 3 Lane 280 Linhong Rd.  
Changning District  
Shanghai 200335  
China  
Tel: (+86 21) 5200 0099  
Fax: (+86 21) 5200 0400